




NO	Name	Material
1	Body	A182 F316L
2	Cap	A182 F316L
3	Stem	A182 F316L
4	Ball	A182 F316L+ENP
5	Sealing Ring	PEEK
6	Seat Ring	A182 F316L
7	Stuffing Box	A182 F316L
9	Upper Gasket	RPTFE
9a	Upper Gasket	RPTFE
10	Packing	FLEXIBLE GRAPHITE
11	Packing press- sleeve	SS316
13	Top Flange	A182 F316L
14	Supporting Board	A182 F316L
20	Regulating Gasket	NYLON
21	Fire Safe Ring	FLEXIBLE GRAPHITE-304
26	Lifting Lug	CS
27	Yoke	CS
T1	Spring	INCONEL X-750
T2	Name Plate	SS304
T3	Seat O-Ring	VITON AED
T5	Antistatic Spring	SS304
W1	electrical actuator	ASSEMBLY
W2	Bearing	SS+PTFE
W3	Bearing	SS+PTFE
W4	Relief Valve	SS
W5	Injector Valve	SS
W6	Injector Valve	SS
W7	Single Valve	SS
W8	Drain Valve	SS
W9	Fire Safe Ring	FLEXIBLE GRAPHITE-304
W10	Fire Safe Ring	FLEXIBLE GRAPHITE-304
B1	Stud	ASTM A193 B7
B2	Nut	ASTM A194 2H
B4	Screw	ASTM A193 B7
B11	Stud	ASTM A193 B7
B12	Nut	ASTM A194 2H
B13	SPRING WASNER	AISI 1566
B21	O-Ring	VITON AED
B24	O-Ring	VITON AED
B25	O-Ring	VITON AED
B26	O-Ring	VITON AED
B30	Key	AISI 1045
B33	Pin	AISI 1045
B35	Pin	AISI 1045
B40	Rivet	铜



C-C

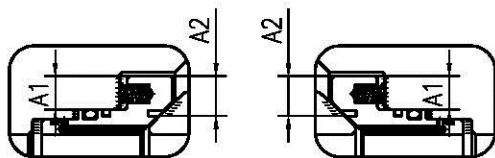

注意A2>A1 (DBB结构)



Accepted Standards

Design & Manufacturing	API 6D
Face to Face	API 6D
Flange Dimensions	ASME B16.5 RTJ
Test	API 598
Firesate Design	API 607
Antistatic	API 6D

Performance standard

Pound Class	2500Lb	
Shell Test	Liquid	51.7MPa
Sealing Test		37.9MPa
Hermetical Sealing Test	gas	0.6 MPa
Suitable Temperature	-29~121°C	
Suitable Medium:	GAS, OIL Etc	

用户 USER:			名称 NAME: API 6D球阀/API 6D Ball Valve 型号 TYPE: Q347PK-2500LB		
项目 ITEM:					
绘图 DRAWING:	LHQ	2014-10-17	用途 DESCRIPTION	图号 FRIGURE NO.	版本号 VER. NO.
审核 AUDITING:			投标 Tender		NO.01
批准 APPROVE:					

10"	223	1292	342.9	425	539.8	675	165.1	17.48	30.18	R2.4	12-Ø67
NPS	d	L	D3	D2	D1	D	C	f	E	R	n-Ød

Unit:mm