


### TECHNOLOGY

1. DESIGN BS 5351  
 2. IN ACCORDANCE WITH ANTI-STATIC DESIGN BS 5351  
 3. BW as Manufacturer  
 4. Face to face as Manufacturer

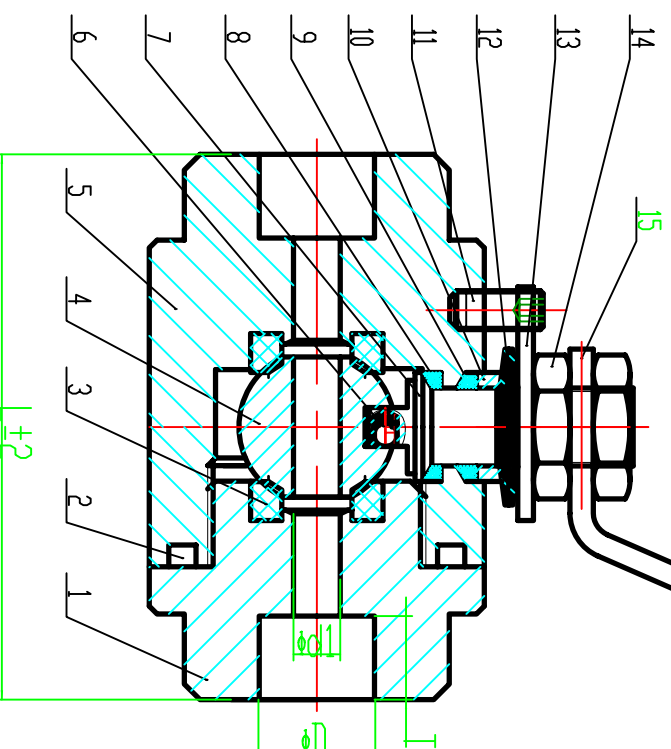

SPEC		
PRESSURE	1.60	
L	SHELL	2.40
	SEAL (M)	1.76
S	SEAL (A)	0.60
WORK TEMP (°C)		
MEDIUM		

15	LEVER	SS-PVC
14	NUT	A194 8M
13	LOCATOR CARD	A570 Gr-A-Zn
12	DISC SPRING	SS304
11	SCREW	A193 8HM
10	PACKING GLAND	SS316
9	PACKING	Graphite
8	VASHER	PTFE
7	STEM	SS304L Anti-stiction
6	ANTI-STATIC DEVICE	SS316
5	BODY	SS304L
4	BALL	SS304L
3	SEAT	PTFE
2	SPIRAL WOUND GASKET	SS316+Graphite
1	BONNET	SS304L

NO	NAME	MATERIAL

BALL VALVE

DN20-25

Q61F-16

DRAWING

DN20-25Q61F-16-00

iø	25	33.8	12.7	105
øø	19	27.1	12.7	95
DN	øD	øD	T	L

DESIGN CRM 14.313